



markem-imaje

a company



Continuous inkjet 9750 E Series: The advanced printers for extrusion



The innovation you need. The experience you trust.

Markem-Imaje is committed to the extrusion industry. Our previous extrusion specific models provided manufacturers with long-lasting, fast-drying, and nonmigrating codes on all materials – even PE. Our proven reliability and our full suite of colors – including two of the market's first, reliable MEK-free inks – now enable manufacturers to code a wide range of materials effectively, sustainably and in the most demanding production environments.

The 9750 E series printers take this performance to the next level with:

- The market's first ever hybrid ink circuit which can print either standard or premium, contrasted codes, vastly increasing flexibility while cutting spare parts for those needing both options
- The market's most environmentally friendly coding solution, which cuts VOCs even for MEK inks, reduces waste sent to landfill
- The market's most easily customizable integration into an Industry 4.0 production line
- One of the industry's highest uptime thanks to a synchronized parts replacement schedule and up to 18,000 hours between services
- An even larger, 10-inch, smartphone style, user interface (UI) to improve line operator data entry – specially designed for extrusion applications
- Five more ink options for electronics coding, and a bend-resistant ink

Key benefits

Innovation

Advanced R&D backed by proven industrial processes and methods

- **Intelli'Inks™** system ensures optimal performance and flexibility when coding different materials—in all colors, with all inks. Bend resistant ink, requiring no pretreatment, avoids stretching even on PE, HDPE and HFFR.
- **Intelli'Swap®** technology streamlines mechanics down to swappable modules.
- **Revolutionary hybrid ink circuit** can print standard codes with dyes or pigmented ones for extra contrast, providing extra flexibility and streamlining spare parts inventory. A market first!

Sustainability

More sustainable solutions =
Long-term value and lower TCO*

- **Intelli'Design®** process and a portfolio of rigorously developed ink formulations help reduce consumable consumption and VOC* emissions by more than 40% while improving operator safety, well-being and TCO

- **IntelliSwap®** means you synchronize parts replacement and swap only individual items, not the entire block.


- **Market-leading service intervals** of up to 18,000 hours

Digitalization

Market's most easily customizable integration

- Currently market's only provider of 24-pin interface customizable to accept any of the 70+ signals available to run lines
- M12 input/output connector and compatible with various industrial protocols, enabling easier and more seamless integration
- Our Connected Printer Services powered by a secure IoT platform**, allow for predictive analysis and to help maximize uptime AND achieve OEE* objectives

9750 E Series continuous inkjet specifications

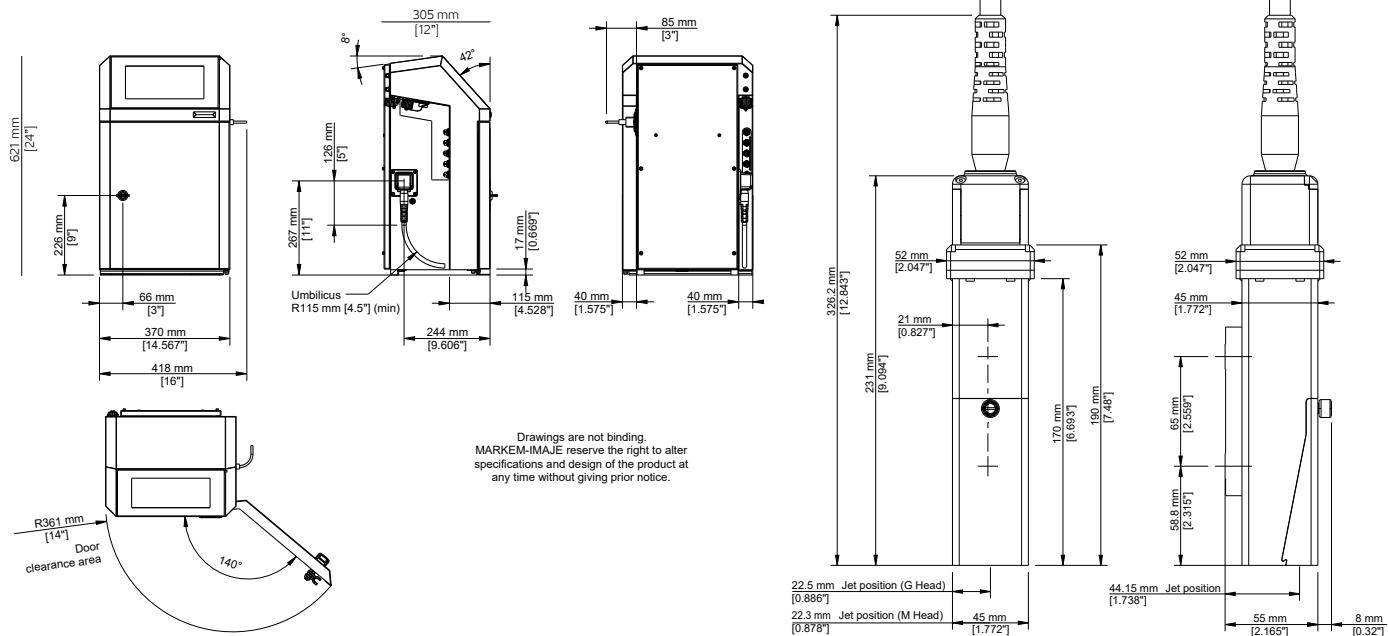

Print features

Mono-jet printhead
G head (printing resolution: 71 dpi)
M head (printing resolution: 115 dpi)
W head (printing resolution: 71 dpi)
Up to 5 lines of print
Print speed: up to 1000 m/min
Font height from 5 to 32 dots
Character height: from 1.2 to 11.2 mm
Wide choice of 1D and 2D barcodes: EAN8/ EAN13/ GS1-128/UPCA/UPCE barcodes, code 39, code 128, interleaved 2 of 5, Datamatrix, QR code
Wide choice of characters: Latin, Arabic, Cyrillic, Hebrew, Japanese, Chinese, Korean, etc.

Other characteristics

Weight: 25 kg
Table-top or vertical mounting
Ultra-flexible 3-meter umbilical cable
Stainless steel cabinet and printhead case
Dust/water ingress protection rating: IP56 requiring no plant air
Operating temperature range: 332 °F to 122 °F (0 °C to 50 °C) depending on ink used
Humidity: 10 to 90% non-condensing
Electrical power supply: 100-240 V; 1,6 A; frequency 50/60 Hz; 30 W

Operations

WYSIWYG 10-inch capacitive color touchscreen: real-time display of remaining print capacity expressed in hours and number of messages; integrated assistance and alert system; simplified message printing and management; creation of user profiles; tracking of consumption and printer availability

Message library (up to 1,000 messages)

Additional functionalities: metering, interleaving of 2 messages, on-the-fly production changes, quick access to counter setting, optimization of tolerance control, chimney characters, DIN mode

Automatic selection of fonts, depending on print speed and printhead/object distance

Specific date management (rounding date function)

Parent/child connectivity

Jet Speed Control guarantees marking quality

Printhead with embedded intelligence for high marking quality and reduced maintenance

Broad range of dye and pigment inks: multi-use, high performance; alcohol based, ketone-free and MEK-free inks

Sealed 0.6 and 0.8-liter consumable cartridges with fool proofing system

Compact and modular ink circuit for better thermal management and controlled additive consumption

100% front access modular ink circuit for a simplified preventive maintenance

Remote Services including MI Virtual Assistant for 24/7 self-troubleshooting and "how to" videos

Quick connect/disconnect of accessories (photocell, alarm and encoder)

Enhanced native connectivity including USB, Ethernet, serial and a configurable M12 connector for I/O

Remote services

Our intelligent self-support solution. Live helpdesk support with remote video capabilities. Markem-Imaje Connected Printer Services powered by a secure IoT platform**

Options

Ultra-flexible 6-meter umbilical cable
IP66 protection (plant air required)
Consumable saving mode for up to -60% additive consumption: at 20 °C less than 3,5 cc/h for MEK-based ink or less than 2cc/h for MEK-free ink
Printhead pressurization kit
Air blade kit
Many I/O possibilities including a configurable single point connector (24 pins)

Accessories

Wide range of accessories
Printer supports: stands (stainless steel or aluminum), table or wall mounting brackets
Printhead supports: stand (stainless steel) and choice of brackets
Photocells
Pigment ink shaker
Encoders
Alarm beacons (24 V)
Set of pre-cabled connectors M12, Ethernet IP66

Software

Fully compatible with CoLOS® Version 6.4 Service Pack onwards

Logo creation with CoLOS® Graphics software

*TCO: Total cost of ownership. VOC: Volatile organic compounds. OEE: Overall equipment effectiveness.

**Internet of things, please check availability in your country



markem-imaje
a DOVER company

9, rue Gaspard Monge - B.P. 110
26501 Bourg-lès-Valence Cedex France
+33 (0) 4 75 75 55 00
markem-imaje.com